




Installation & Instructions

Included Parts

- Wireless Charging Puck
- Phone Mounting Plate
- USB-C Charging Cable

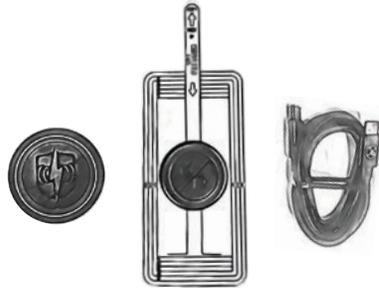

⚠ WARNING: Do not use magnetic mount near hard-drive based devices such as an iPod Classic / Video. Use caution when using near pacemakers and other medical devices.


Check local and state vehicle laws regarding mobile device mounting and use. Do not mount any device on or near vehicle airbags.

⚠ WARNING: This product can expose you to chemicals including DEHP, DINP and BPA, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov

Phone Mounting Plate Installation



1. Wipe phone or case surface with included wipe before applying template.

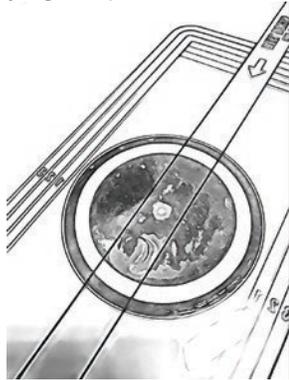

2. Mag Flex Plate Installation tool has guide lines, ABCDE and 123.



3. Point pull tab up and make sure Mob Armor Logo is positioned the direction you want it positioned. Peel down center tab to expose the adhesive center of Mag Flex Plate. Use letter and number markers to find the center of your phone over your wireless charging location.

Note: Mag Safe Cases and Phones will magnetically position center. Non Mag Safe devices will require alignment template.



4. Hold down center of Mag Flex Plate with one hand and peel down and back the sides of position template. Double check you are centered and aligned than remove template. Press firmly with both hands the Mag Flex plate to your phone or case. Lets Adhesive cure for 10 minutes before use.

Using With MobNetic Mounts

Compatible with MobNetic Maxx, MobNetic Pro 90, MobNetic Go, MobNetic Stik, MobNetic STXX



1. Attach charger to mount before plugging in.
2. Connect USB-C Cable to mount and adapter.
3. Mount charger and MobNetic mount to desired location.

⚠ WARNING:

It is possible for the Wireless Charger / Transmitter to interfere with some wireless systems within a car. Specifically, key fobs with immobilizers, keyless start systems or tire pressure monitors.

It is recommended to test the location of your transmitter before deciding on final placement. Most interference issues will be minimized by considering the following placement guidelines:

Install transmitter a minimum of 10 inches away from the ignition lock, key fob docking station, or any location where the key fob might be stored while driving.

If the transmitter cannot be located a sufficient distance away as described above, please use the following suggestions whenever possible:

- Insert the key fob into the docking slot whenever possible while operating the transmitter.

- Connect the transmitter to a 12-volt accessory port that is powered only while the vehicle's ignition is in the "ACC" or "ON" position.

- Place phone on transmitter after vehicle is started.

IMPORTANT! DO NOT RETURN PRODUCT TO RETAILER!

IF YOU NEED WARRANTY SERVICE OR REPLACEMENT PARTS, PLEASE REACH OUT TO US DIRECTLY! → **(805) 214-1815**