

Warranty Information

Safety Guidelines:

Stop the vehicle in a safe location or have a passenger use the system. Safely operate the vehicle, obey all laws and regulations, and use good judgment at all times. Note: User assumes sole responsibility for and all risk in using this system.

General Guidelines:

Install the device in a non-obstructive, safe location within the vehicle cab. Avoid obstructing the following: Vehicle operation, Visibility through windows, Safe entry or exit, Safety devices such as air bags. Firmly secure the device to stay in place despite vibrations, shocks bumps, or vehicle accidents. Do not use this system or any computer system while operating a motor vehicle. Mob Armor is not responsible or liable for personal and or property damage.

What does your 100% Satisfaction Guarantee mean?

Our 100% Satisfaction Guarantee means we guarantee you will be satisfied with your Mob Armor Product, or we will refund your money. If you are unsatisfied with your product at any time within 30 days of your purchase, you can return it to us for a full refund, no questions asked. You pay shipping back to us. We do not refund any shipping cost.

What warranty does Mob Armor offer?

The Mob Armor Warranty covers all defects in workmanship or materials of our products for up to one year. This warranty applies only to the original purchaser at retail and may not be transferred. This warranty only covers defects arising under normal usage and does not cover any malfunction, damage or failure due to accident, misuse, abuse, neglect, alteration, modification or repair by other than an authorized service center for Mob Armor products. Scratching of the powder-coated surface, anodizing or plastic constitutes normal wear and is not covered under warranty. For complete warranty information please visit mobarmor.com/warranty

⚠ WARNING: Do not use magnetic mount near hard-drive based devices such as an iPod Classic / Video. Use caution when using near pacemakers and other medical devices.

Check local and state vehicle laws regarding mobile device mounting and use. Do not mount any device on or near vehicle airbags.

IMPORTANT! DO NOT RETURN PRODUCT TO RETAILER!

IF YOU NEED WARRANTY SERVICE OR REPLACEMENT PARTS, PLEASE REACH OUT TO US DIRECTLY! → (805) 214-1815



SCAN ME
FOR PRODUCT SUPPORT

RAD MOUNT

VISIT WWW.MOBARMOR.COM FOR
QUESTIONS, COMMENTS OR CONCERNS

RAD MOUNT



**INSTALLATION
& INSTRUCTIONS**

SKU: MOB-RAD-HH REV 31423



MOB ARMOR


Step #1: Determining Primary Radio Intended to be used with the RAD Mount.

Out of the many brands that might fit the RAD Mount, we will assure the fitment of the main three manufacturers: Kenwood, Icom, and Baofeng models including Rugged Radio's


Step #2: Rubber Isolator Pad Selection/ Fitment

There are two shield shaped isolator/grip pads with 3M Adhesive on the back surface included in the accessory pack. Of these two pads, the 3mm thick pad is for Kenwood, Rugged Radio and Baofeng handheld radios. However, Models change overtime or there are new models that we may not of encountered at the time of engineering this product.

In some cases the rubber pad may not be required at all. The thicker of the two, 6mm thick, is solely for the Icom Radio. Before taking the backing off of the rubber pad and placing on the face of the RAD Mount, check the fitment of the pad with the intended radio to ensure the proper fitment. See the figure below for a picture representation.



Once the proper pad is selected, follow the picture instructions below to line up the pad properly on the face of the RAD Mount.

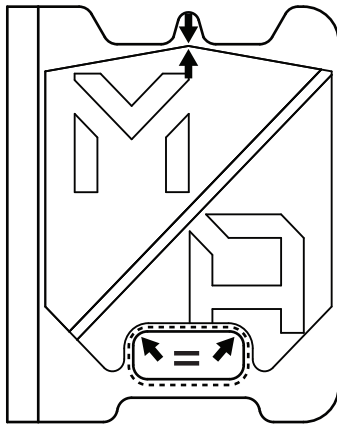

Make sure that there is even space on the bottom of the rubber pad to ensure that the pad is properly installed.

Step #3: Magnetic Mounting-Surface Preparation

Surface Preparation: During this step it is crucial to have clean hands as to not reintroduce contaminants to the surface in question. Make sure the surface that has been chosen to mount the Mob Disc/Plate to is a relatively flat, non-porous surface that is oil free and clean of debris. To help clean the surface use the provided Alcohol wipes to do a final clean-up of the surface. Once the surface is dry, clean of oil/dust and debris free, continue to Step #4.



Step #4: Attachment and Curing/Setting Time Before use

Once the surface has dried from the alcohol wipe, prepare the Mob Disc/Plate by removing the backing of the adhesive and pressing the Mob Disc/Plate onto the surface. Apply moderate pressure to the plate and the device in order to let the 3M adhesive to adhere to the mounting surface/ mobile device's protective case. (Let cure for 24 hours)

Alternatively, you can hard mount using a screw and the through hole on the mount. Remove the magnet first.

